Richard P. Tarquini, Richard L. Schertz, and George Simon Gales Method, Computer Readable Medium, and Node for Detecting Exploits Based on an Inbound Signature of the Exploit and an Outbound Signature in Response Thereto

1/5






FIG.1

10016862-1


Richard P. Tarquini, Richard L. Schertz, and George Simon Gales Method, Computer Readable Medium, and Node for Detecting Exploits Based on an Inbound Signature of the Exploit and an Outbound Signature in Response Thereto






10016862—1 Richard P. Tarquini, Richard L. Schertz, and George Simon Gales Method, Computer Readable Medium, and Node for Detecting Exploits Based on an Inbound Signature of the Exploit and an Outbound Signature in Response Thereto 3/5

FIG. 4



10016862—1 Richard P. Tarquini, Richard L. Schertz, and George Simon Gales Method, Computer Readable Medium, and Node for Detecting Exploits Based on an Inbound Signature of the Exploit and an Outbound Signature in Response Thereto

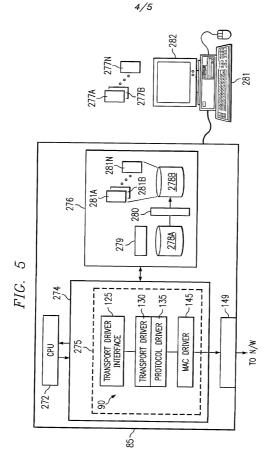

Richard P. Tarquini, Richard L. Schertz, and George Simon Gales Method, Computer Readable Medium, and Node for Detecting Exploits Based on an Inbound Signature of the Exploit and an Outbound Signature in Response Thereto 5/5

